

A

# SPECTRA

Trumpet Horn  
IP Rating: IP65  
Temp: -25 °C to +50 °C  
Unit weight: 148g  
CE

Order code Voltage  
H100T030G 12-30V AC/DC  
• 12V dc 10mA  
• 24V dc 24mA  
• 12V ac 50/60Hz 30mA  
• 24V ac 50Hz 62mA

H100T230G 40-260V AC/DC  
• 48V dc 15mA  
• 48V ac 50/60Hz 25mA  
• 115V dc 6mA  
• 230V dc 3mA  
• 115V ac 50/60Hz 19mA  
• 230V ac 50/60Hz 10mA


# H100 T

Dimensions : 94.2 x 177.5mm  
1.5mm<sup>2</sup> terminals  
Cable entry: 1 x 5-7mm push  
through grommet

Tel: +44 (0)2 8743 8880 Fax: +44 (0)20 8740 4200  
mail: sales@e2s.com web: www.e2s.com



D

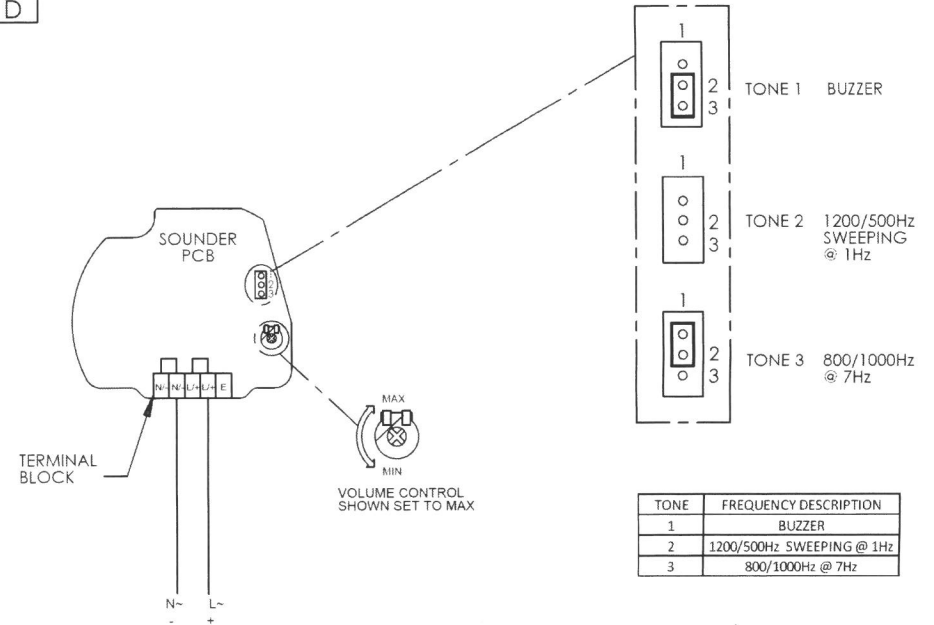

B

- ⚠ ATTENTION:** Installation must be carried out by an electrician in compliance with the latest codes and regulations.
- ⚠ ATTENTION:** Disconnect from power source before installation or service to prevent electric shock.


C



D152-00-001-US\_SHT\_1\_GS(E)



# A SPECTRA H 100 T

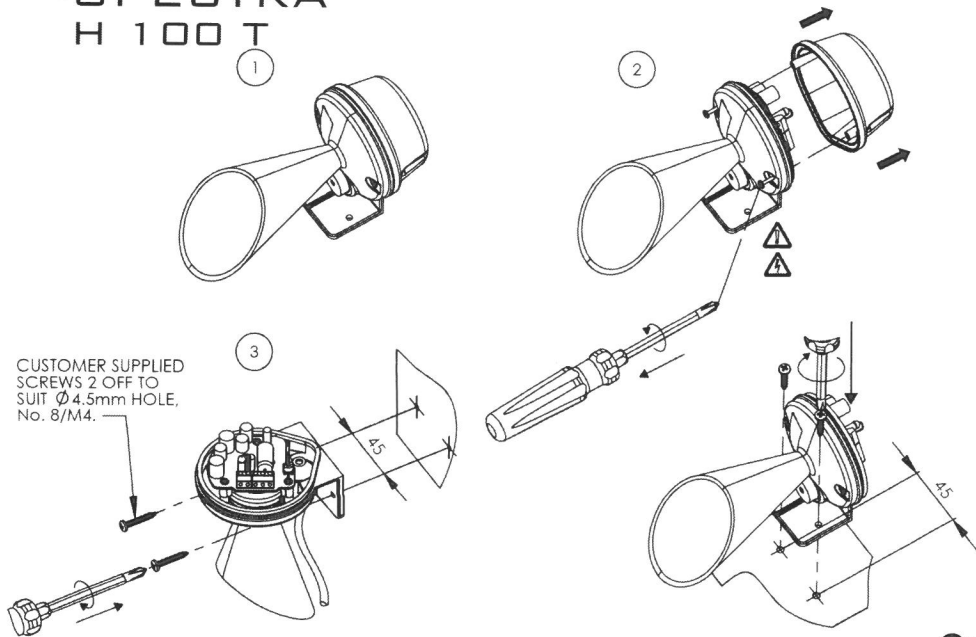


Tel: +63 (0)2 8743 8860 Fax: +66 (0)20 8740 4200  
 Mail: sales@e2s.com web: www.e2s.com




# C

TERMINAL BLOCK	A/C INPUT	D/C INPUT
N/-	N-	-
N/+	N~(FROM BEACON)	-(FROM BEACON)
L/+	L-	+
L/+	L~(FROM BEACON)	+(FROM BEACON)
E		

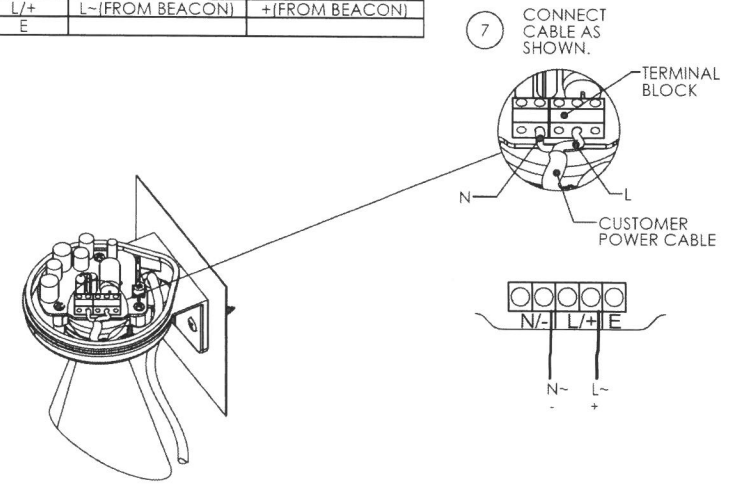

# B

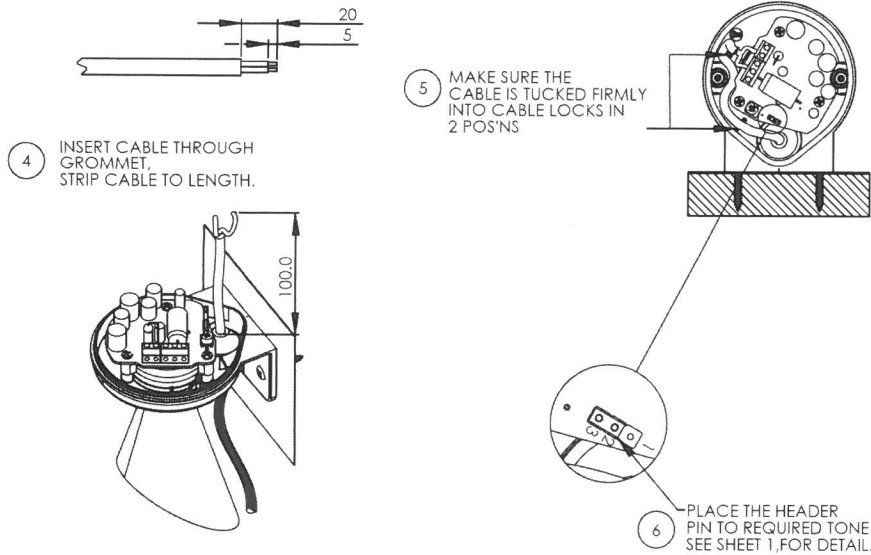

Dimensions in mm



# D

